



LEX5 Factory Microphone Retention

The VLine2 and VLite2 products can retain the factory microphone in this vehicle with our supplied 3.5mm to 2 Wire harness and 2 Posi-Taps. The factory microphone wires are located behind the display on a 28 pin or 40 pin connector. You will need to connect the Microphone +/- from our adapter harness to the factory Microphone +/- wires with the supplied Posi-Taps. Below are those listed by vehicle make:

Connectors shown from Wire/Harness side view

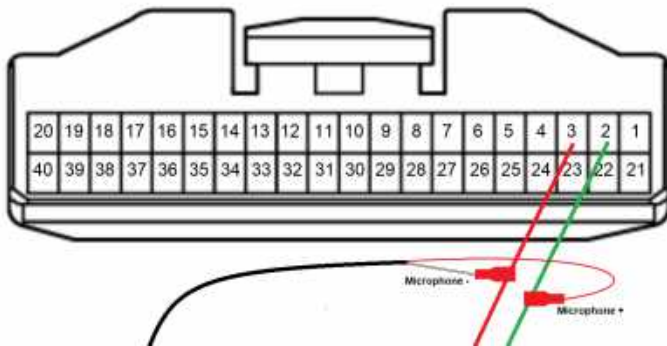


40 Pin Connector:
Prius, GX, and RX
Microphone + / Green Wire / Pin Slot 2
Microphone - / Red Wire / Pin Slot 3

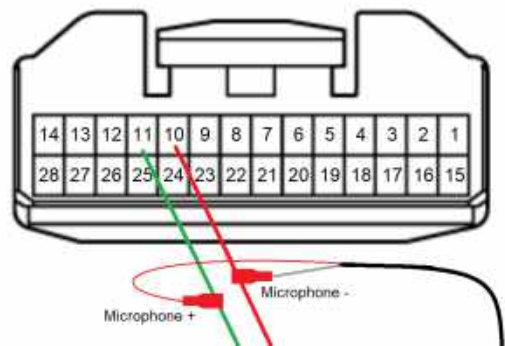


28 Pin Connector:
Land Cruiser, GS, LS, IS, LX, and ES
Microphone + / Green Wire / Pin Slot 11
Microphone - / Red Wire / Pin Slot 10


Here are the steps to connect these wires:

1. Locate the 40 or 28 pin factory connector
2. Find the Green and Red wires for the factory microphone
3. Connect a Posi Tap to each wire
4. Take our 3.5mm to 2 wire harness and insert the Red and White wires in the top of the Posi Taps. (Red is Microphone + and Black is Microphone -)
5. Tighten both Posi Taps and ensure both wires are seated fully

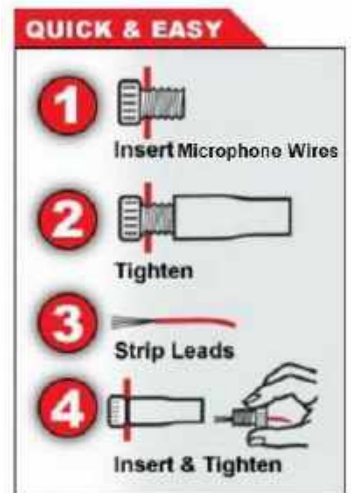

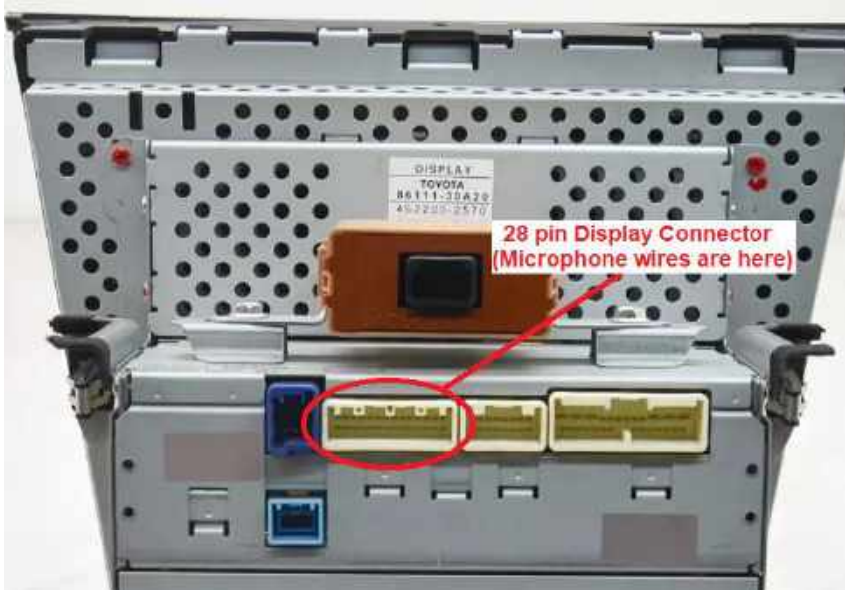

28 Pin Connector:
 Land Cruiser, GS, LS, IS, LX, and ES
 Microphone + / Green Wire / Pin Slot 11
 Microphone - / Red Wire / Pin Slot 10

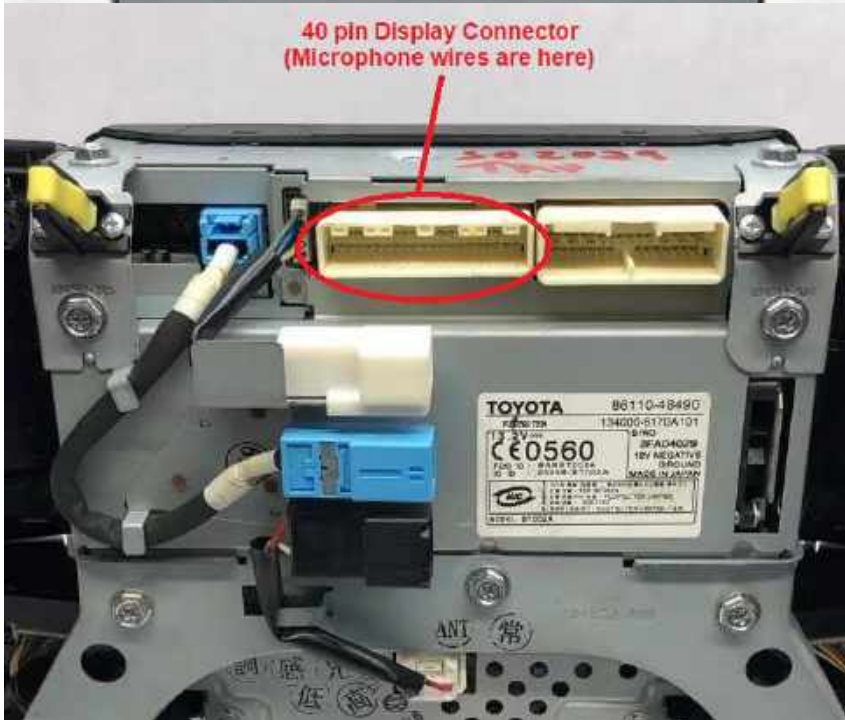

40 Pin Connector:
 Prius, GX, and RX
 Microphone + / Green Wire / Pin Slot 2
 Microphone - / Red Wire / Pin Slot 3

If you experience any issues with audio quality while using the factory microphone, please ensure the microphone gain is not set too high. We recommend using around 20-30 for the factory microphones.

Here is where to find that on the VL2:

1. Go to the Hamburger Menu in the Upper Left of the VLine Home Screen
2. Open Settings from the Hamburger Menu
3. Scroll down and find Microphone Gain

Here is where to find that on the VT2:

1. Open Settings from the VLite Home Screen
2. Scroll down and find Microphone Gain